

2-1/2" WOODGRIP SCREW ATTACHED EVERY OTHER HIGH RIB (14" OC)

PERMATILE 26g METAL PANEL

STANDARD 5 BREAK RIDGE

2-1/2" #10 WOODGRIP SCREW WITH EPDM WASHER AT EVERY HIGH RIB

OUTSIDE FOAM CLOSURE (28" COVERAGE)


UNDERLAYMENT MINIMUM 30# FELT

TRUSS (TYP.)

PLYWOOD (TYP.)

THIS PAGE CONTAINS GENERAL APPLICATION DETAILS-
ACTUAL INSTALLATION MAY REQUIRE ADDITIONAL ITEMS BASED ON GOOD ROOFING PRACTICES.

FOR FLORIDA BUILDING CODE & HVHZ INSTALLATION REQUIREMENTS SEE ENGINEER SEALED DETAIL PAGES.

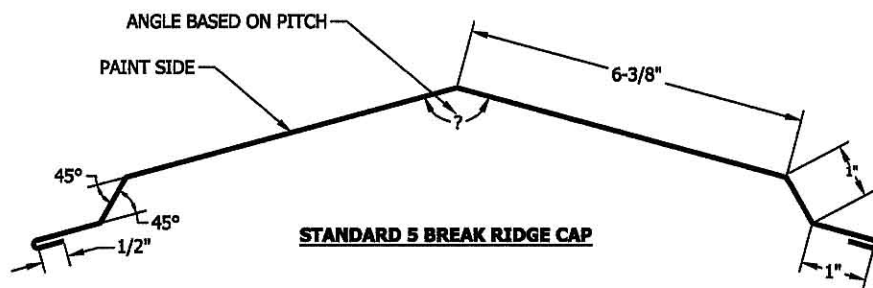

PERMATILE ROOFING

A Division of Advanced Aluminum

DESCRIPTION: 5 BREAK RIDGE CAP DETAIL- NON VENTED

STYLE: FOR USE ON PLYWOOD DECKING

FILE: PTSBRKRIDGE-01